
Holman

Instruction Guide 40644



Holman Rancho Cordova, CA 95742 800-343-7486 InstallationSupport@Holman.com

20200506R1 DATE:

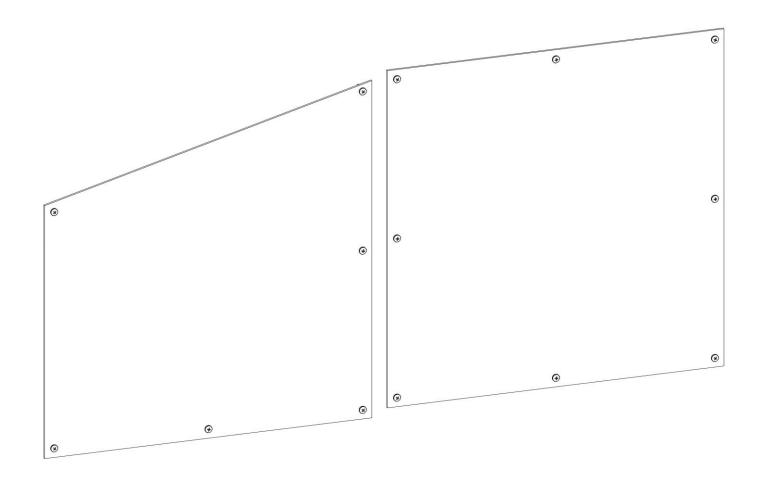

PLEASE READ ALL INSTRUCTIONS AND WARNINGS PRIOR TO ASSEMBLING, INSTALLING, AND USING THIS PRODUCT.

Warning



Always check for electrical wires, fuel tanks and lines, brake lines and other important vehicle functionality items prior installing any product.

Tools Needed

| #2 Phillips Head Screw Driver 5/16" Box Wr | ench |
|--|------|
|--|------|

Table of Contents

| Parts List | 2 |
|-------------------------|---|
| Hardware | 2 |
| Install Partition Cover | 3 |

Before You Begin

- Read all instructions prior to installing any Kargo Master product.
- Refer to 40640 installation instructions for installing the partition.



Parts List

| ITEM NO. | ITEM | PART NUMBER | DESCRIPTION | QTY |
|-------------|------|-------------|--|-----|
| 1 | | 40644-01 | TRANSPARENT PERFORATED PARTITION COVER, LARGE | 1 |
| 2 | | 40644-02 | TRANSPARENT PERFORATED PARTITION COVER, SIDE | 1 |
| 3 | | 18-40644 | HARDWARE KIT | 1 |


Hardware

| ITEM | HARDWARE TO SCALE | PART NUMBER | DESCRIPTION | QTY. |
|------|-------------------|-------------|--|------|
| 1 | | 0149499 | 10-32 X 5/8" PHILLIPS HEAD SCREW | 14 |
| 2 | | 0166996 | 10-32 FLANGED LOCK NUT | 14 |



Install Partition Cover

• Hold partition cover firmly against front of partition with holes in partition cover aligned with holes in partition and the foam seal towards partition. Front of partition is opposite the flanged side.

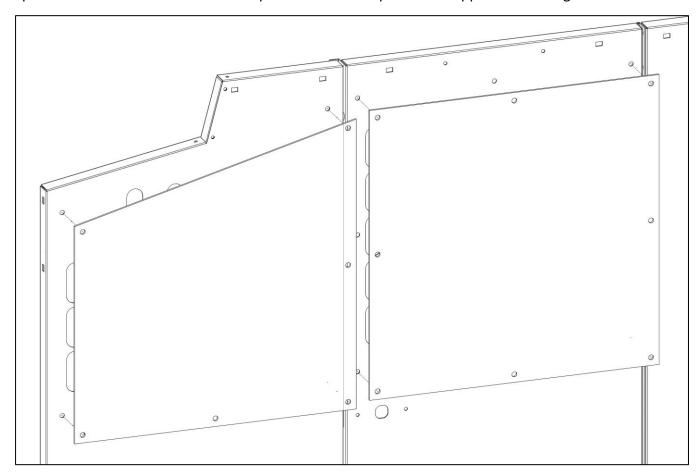

- For each hole in the partition cover, loosely attach the partition cover to the partition using a #10 x 5/8" screw and a #10 lock nut.
- DO NOT TIGHTEN screws until all screws have been loosely installed.
- Tighten all screws.



